




**ප්‍රධාන ලේකම් කාර්යාලය - බස්නාහිර පළාත**  
**பிரதான செயலாளர் அலுவலகம் - மேல் மாகாணம்**  
**OFFICE OF THE CHIEF SECRETARY - WESTERN PROVINCE**



204, ඩෙන්සිල් කොබ්බෑකඩුව මාවත, බත්තරමුල්ල.  
 204, டென்சில் கொப்பேகடுவ மாவத்தை, பத்தரமுல்ல.  
 204, Denzil Kobbekaduwa Mawatha, Battaramulla.



ප්‍රධාන ලේකම් } දුරකථන / தொலைபேசி / Telephone - 011 - 2092599  
 பிரதான செயலாளர் } அலுவல் / பெக்ஸ் / Fax - 011 - 2092601  
 Chief Secretary } 0-93627 / மின்னஞ்சல் / E-mail - chiefsecretary@wpc.gov.lk } 011 - 2093000  
 பொது දුරකථන }  
 தொலைபேசி இலக்கம் } 011 - 2093000  
 General Telephone }

මගේ අංකය } CSWP/ENG-CON/5-2/FI/1(C) } ඔබේ අංකය } 2023.02.22  
 My No. } } Your No. } Date }

පළාත් ගොඩනැගිලි අධ්‍යක්ෂ/ වාරිමාර්ග අධ්‍යක්ෂ/ අධ්‍යක්ෂ (ඉංජිනේරු),  
 සාමාන්‍යාධිකාරී, පළාත් බදු මාර්ග සංවර්ධන අධිකාරිය (බ.ප.),  
 පළාත් සෞඛ්‍ය සේවා අධ්‍යක්ෂ, ප්‍රාදේශීය සෞඛ්‍ය අධ්‍යක්ෂ (කොළඹ, ගම්පහ, කළුතර)  
 පළාත් පාලන කොමසාරිස් සහ සියලුම පළාත් පාලන ආයතන ලේකම්වරුන්,  
 බස්නාහිර පළාතේ සියලුම ප්‍රාදේශීය ලේකම්වරුන්,  
 ප්‍රාදේශීය ඉංජිනේරුවරුන්,

**ගොඩනැගිලි ගාස්තු උපලේඛණය - 2022 - Revision - 04**

2022.12.23 දිනැති ලිපියෙන් නිකුත් කරන ලද ගොඩනැගිලි ගාස්තු ලේඛණයේ ඇතුළත් පහත සඳහන් අයිතමයන්ගේ වැඩ විස්තර හා මිල ගණන් පහත පරිදි සංශෝධනය කරනු ලබන බව දන්වමි.

02. මෙම සංශෝධනය 2023.02.22 දින සිට බලපැවැත්වෙන බව වැඩිදුරටත් දන්වා සිටිමි.

+Item No.	Description	Unit	Rate
Q 21	Roofing with calicut pattern tiles on imported Balau or Kempas timber frame work complete with ridge hips etc. comprising of 165mm x 45mm ridge plate, 94mm x 70mm wall plate, 94mm x 45mm rafters @ 18" c/c and 45mm x 22mm reepers @ 12" c/c. Application of two coats of wood preservative paid separately.	Sqr.	120,653.00
Q 21a	Roofing with Calicut pattern tiles on approved local timber (micro or equivalent) frame work complete with ridge hips etc. comprising of 165mm x 45mm ridge plate, 94mm x 70mm wall plate, 94mm x 45mm rafters @ 18" c/c and 45mm x 22mm reepers @ 12" c/c. Application of two coats of wood preservative paid separately.	Sqr.	78,852.00
Q 22	Roofing with corrugated asbestos sheets on imported Balau or Kempas timber frame work (Ridging measured separately).Comprising of 165mm x 45mm ridge plate, 94mm x 70mm wall plate, 94mm x 45mm rafters @ 30" c/c and 45mm x 45mm battens @ 3'-0" c/application of two coats of wood preservative paid separately.	Sqr.	82,440.00




Q 22a	Roofing with corrugated asbestos sheets on approved local timber (micro or equivalent) frame work (Ridging measured separately).Comprising of 165mm x 45mm ridge plate, 94mm x 70mm wall plate, 94mm x 45mm rafters @ 30" c/c and 45mm x 45mm battens @ 3'-0" c/application of two coats of wood preservative paid separately.	Sqr.	63,006.00
Q 23	Supplying and fixing 190mm x 94mm, 165mm x 45mm, 140mm x 94mm, 140mm x 70mm, 140mm x 45mm, 117mm x 190mm and 45mm x 190mm imported Balau or Kempas timber purlin, hip/valley rafters etc. Application of two coats of wood preservative paid separately.	Cu.ft.	22,610.00
Q 23a	Supplying and fixing 190mm x 94mm, 165mm x 45mm, 140mm x 94mm, 140mm x 70mm, 140mm x 45mm, 117mm x 190mm and 45mm x 190mm approved local timber (micro or equivalent) purlin, hip/valley rafters etc. Application of two coats of wood preservative paid separately.	Cu.ft.	15,609.00
Q 24	Supplying and fixing 117mm x 70mm purling up to 12'-0" length imported Balau or Kempas timber. Application of two coats of wood preservative paid separately.	L.ft.	1,758.00
Q 24a	Supplying and fixing 117mm x 70mm purling up to 12'-0" length approved local timber (micro or equivalent). Application of two coats of wood preservative paid separately.	L.ft.	1,070.00
Q 25	Supplying and fixing 94mm x 70mm wall plates up to 12'-0" length, imported Balau or Kempas timber. Application of two coats of wood preservative paid separately.	L.ft.	1,309.00
Q 25a	Supplying and fixing 94mm x 70mm wall plates up to 12'-0" length, approved local timber (micro or equivalent). Application of two coats of wood preservative paid separately.	L.ft.	840.00
Q 26	Supplying and fixing 117mm x 70mm, 117mm x 45mm, 94mm x 70mm imported Balau or Kempas timber purlins, wall plates, rafters etc. Application of two coats of wood preservative paid separately.	Cu.ft.	14,958.00
Q 26a	Supplying and fixing 117mm x 70mm, 117mm x 45mm, 94mm x 70mm approved local timber (micro or equivalent) purlins, wall plates, rafters etc. Application of two coats of wood preservative paid separately.	Cu.ft.	9,602.00
Q 27a	Supplying and fixing 94mm x 45mm approved local timber (micro or equivalent) purlin, rafters etc. Application of two coats of wood preservative paid separately.	L.ft.	523.00



Q 28	Supplying and fixing 45mm x 45mm imported Balau or Kempas timber bearers. Application of two coats of wood preservative paid separately.	L.ft.	274.00
Q 28a	Supplying and fixing 45mm x 45mm approved local timber (micro or equivalent) bearers. Application of two coats of wood preservative paid separately.	L.ft.	155.00
Q 29	Supplying and fixing 45mm x 22mm imported Balau or Kempas timber reepers. Application of two coats of wood preservative paid separately.	L.ft.	201.00
Q 29a	Supplying and fixing 45mm x 22mm approved local timber (micro or equivalent) reepers. Application of two coats of wood preservative paid separately.	L.ft.	80.00
Q 36	Asbestos flat ceiling fixed with coves & fillets to imported Balau or Kempas timber frame work of 94mm x 45mm @ 4' - 0" c/c , 45mm x 45mm @ 2' - 0" c/c, fillet size to be 1 " x 1/4" and cove moulding size to be 1 1/2" x 1 1/2". Application of two coats of wood preservative paid separately.	Sqr.	92,014.00
Q 36a	Asbestos flat ceiling fixed with coves & fillets to approved local timber (micro or equivalent) frame work of 94mm x 45mm @ 4' - 0" c/c , 45mm x 45mm @ 2' - 0" c/c, fillet size to be 1 " x 1/4" and cove moulding size to be 1 1/2" x 1 1/2"Application of two coats of wood preservative paid separately.	Sqr.	70,352.00
Q 37	Asbestos flat eaves ceiling fixed with coves and fillets fixed with timber work of imported Balau or Kempas timber frame work of 45mm x 45mm @ 2' - 0" c/fillet size to be 1 " x 1/4" cove moulding size to be 1 1/2" x 1 1/2". Application of two coats of wood preservative paid separately.	Sqr.	67,802.00
Q 37a	Asbestos flat eaves ceiling fixed with coves and fillets fixed with timber work of approved local timber (micro or equivalent) frame work of 45mm x 45mm @ 2' - 0" c/fillet size to be 1 " x 1/4" cove moulding size to be 1 1/2" x 1 1/2". Application of two coats of wood preservative paid separately.	Sqr.	53,647.00
Q 38	3/4" thick x 6" wide tongued and grooved lunumidella ceiling planks fixed flat on 94mm x 45mm imported Balau or Kempas and timber joist at every 2' - 0" c/c. Cove moulding size to be 1 1/2" x 1 1/2". Application of two coats of wood preservative paid separately.	Sqr.	89,367.00

Q 38a	3/4" thick x 6" wide tongued and grooved lunumidella ceiling planks fixed flat on 94mm x 45mm approved local timber (micro or equivalent) and timber joist at every 2' - 0" c/c. Cove moulding size to be 1 1/2" x 1 1/2". Application of two coats of wood preservative paid separately.	Sqr.	72,736.00
J 02	Gauge 750 polythene damp proof membranes with 6" laps lay under floors.	Sqr	647.00
S 52	Supply and fixing Chromium plated tooth brush holder. Prime cost of the tooth brush holder is Rs.3,000.00	Nr.	3,911.00
S 53	Supply and fixing Chromium plated Soap Tray. Prime cost of the soap tray is Rs.1,800.00	Nr.	2,495.00
S 54	Supply and fixing Chromium plated Single Towel Bar. Prime cost of the towel bar is Rs.2,500.00	Nr.	3,335.00

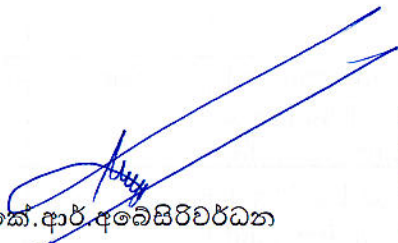  
 ඉංජි. කේ. ආර්. අබේසිරිවර්ධන  
 නියෝජ්‍ය ප්‍රධාන ලේකම් (ඉංජිනේරු),  
 ඉංජිනේරු කාර්යාංශය,  
 බස්නාහිර පළාත.

ඉංජි. කේ. ආර්. අබේසිරිවර්ධන  
 නියෝජ්‍ය ප්‍රධාන ලේකම් (ඉංජිනේරු)  
 ප්‍රධාන ලේකම් කාර්යාලය (බ.ප)  
 පස්වන මහල, අංක 204,  
 බෙන්සින් කොඩිබකඩුව මාවත,  
 බත්තරමුල්ල.

පිටපත්:

1. ප්‍රධාන ලේකම් (බ.ප.) : කරු.දැ.ස.
2. දිස්ත්‍රික් ලේකම්වරුන් (කොළඹ/ ගම්පහ/ කළුතර) : දිස්ත්‍රික් ලේකම් කාර්යාලයේ  
ඉංජිනේරුවරුන්ගේ දැනගැනීම සඳහා  
යොමුකරන්න
3. බස්නාහිර පළාතේ සියලුම අමාත්‍යාංශ ලේකම්වරුන් : දැ.ස.
4. නියෝජ්‍ය ප්‍රධාන ලේකම් (මූල්‍ය/ සැලසුම්) : දැ.ස.
5. අධ්‍යක්ෂ (අභ්‍යන්තර විගණන) : දැ.ස.
6. සහකාර විගණකාධිපති : දැ.ස.